



## Yuasa Technisches Datenblatt

### Yuasa DLMA-145 - Leisure-Batterien

#### Leistung

|                               |        |
|-------------------------------|--------|
| Spannung                      | 12V    |
| Kapazität 20 Std (vorgegeben) | 145Ah  |
| Kaltstartstrom (A) EN1        | 900A   |
| Marine Cranking Amps (MCA)    | 1080A  |
| Watt Hour                     | 1740Wh |

#### Abmessungen

|        |       |
|--------|-------|
| Länge  | 513mm |
| Breite | 189mm |
| Höhe   | 223mm |



#### Maße und Gewichte

|                            |      |
|----------------------------|------|
| Durchschnittliches Gewicht | 37kg |
| inkl. Säure                |      |

#### Gehäuseeigenschaften

|                             |                                         |
|-----------------------------|-----------------------------------------|
| Gehäusotyp                  | DIN A                                   |
| Zellenanordnung             | 3                                       |
| Batteriehälter              | N                                       |
| Ladezustandsanzeige         | ✓                                       |
| Tragegriffe                 | ✓                                       |
| Entgasung                   | ✓                                       |
| Semi Traktionseigenschaften | ✓                                       |
| Deckeltyp                   | SMF doppelwandige<br>Deckelkonstruktion |


#### Technologie

|                       |       |
|-----------------------|-------|
| Flammschutz           | ✓     |
| Technologie           | Ca/Ca |
| Adskiller             | PE    |
| Empfohlener Ladestrom | 7A    |

#### Anschlusspol Typ

##### T1


Standard DIN Post

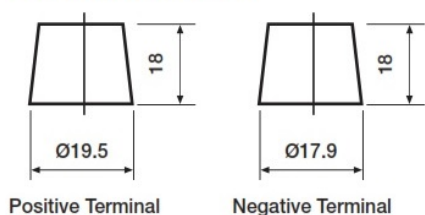

Positive Terminal

Negative Terminal

#### Zellenanordnung

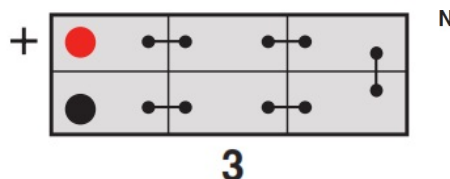

#### Batteriehälter



Datenblatt erstellt am 01/04/2025 - E&EO



## Yuasa Technical Data Sheet

### Yuasa DLMA-145 - Leisure Batteries

#### Performance

|                            |        |
|----------------------------|--------|
| Voltage                    | 12V    |
| Capacity (20-hour)         | 145Ah  |
| Cold Cranking Amps (EN1)   | 900A   |
| Marine Cranking Amps (MCA) | 1080A  |
| Watt Hour                  | 1740Wh |

#### Dimensions

|        |       |
|--------|-------|
| Length | 513mm |
| Width  | 189mm |
| Height | 223mm |



#### Weights & Measures

|                       |      |
|-----------------------|------|
| Mean Weight with Acid | 37kg |
|-----------------------|------|

#### Container Features

|                           |                |
|---------------------------|----------------|
| Case Type                 | DIN A          |
| Cell Layout               | 3              |
| Hold Down                 | N              |
| State of Charge Indicator | ✓              |
| Handles                   | ✓              |
| End Venting               | ✓              |
| Semi-Traction Features    | ✓              |
| Lid Type                  | SMF Double Lid |


#### Technology

|                         |       |
|-------------------------|-------|
| Flame Arrestor          | ✓     |
| Technology              | Ca/Ca |
| Separator               | PE    |
| Recommended Charge Rate | 7A    |

#### Terminal Type

##### T1


Standard DIN Post

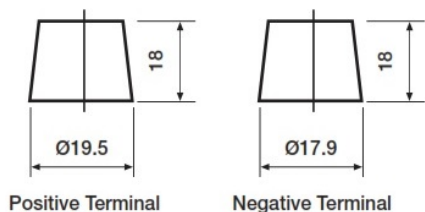

Positive Terminal

Negative Terminal

#### Cell Assembly Layout

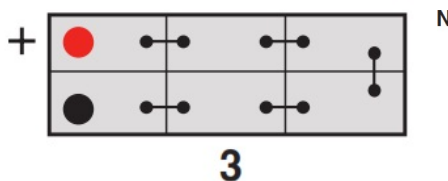

#### Battery Hold-down



Data Sheet generated on 01/04/2025 – E&OE