



Yuasa Technisches Datenblatt

Yuasa M24-AGM - Schiffsbatterien

Leistung

Spannung	12V
Kapazität 20 Std (vorgegeben)	60Ah
Kaltstartstrom (A) EN1	640A
Marine Cranking Amps (MCA)	760A
Watt Hour	720Wh

Abmessungen

Länge	242mm
Breite	175mm
Höhe	190mm



Maße und Gewichte

Durchschnittliches Gewicht inkl. Säure	17.7kg
--	--------

Gehäuseeigenschaften

Gehäusotyp	L2 DIN AGM
Batteriehälter	B3
Tragegriffe	✓
Entgasung	✓
Semi Traktionseigenschaften	✓
Deckeltyp	VRLA

Technologie

Flammschutz	✓
Technologie	Ca/Ca VRLA
Adskiller	AGMSORTIMENT
Empfohlener Ladestrom	4A

Anschlusspol Typ

T1


Standard DIN Post




Positive Terminal

Negative Terminal

Zellenanordnung

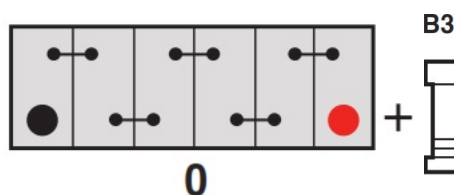

Batteriehälter

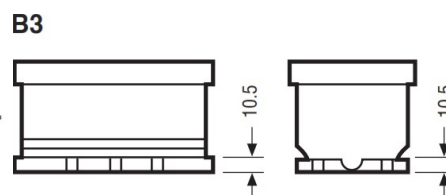

Datenblatt erstellt am 01/04/2025 - E&EO



Yuasa Technical Data Sheet

Yuasa M24-AGM - Marine Batteries

Performance

Voltage	12V
Capacity (20-hour)	60Ah
Cold Cranking Amps (EN1)	640A
Marine Cranking Amps (MCA)	760A
Watt Hour	720Wh

Dimensions

Length	242mm
Width	175mm
Height	190mm



Weights & Measures

Mean Weight with Acid	17.7kg
-----------------------	--------

Container Features

Case Type	L2 DIN AGM
Hold Down	B3
Handles	✓
End Venting	✓
Semi-Traction Features	✓
Lid Type	VRLA

Technology

Flame Arrestor	✓
Technology	Ca/Ca VRLA
Separator	AGM
Recommended Charge Rate	4A


Terminal Type

T1


Standard DIN Post



Cell Assembly Layout

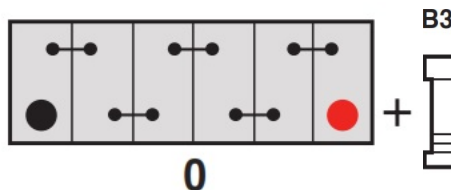

Battery Hold-down

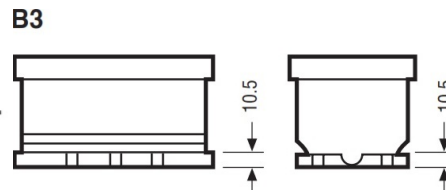

Data Sheet generated on 01/04/2025 – E&OE