



Yuasa Technisches Datenblatt

Yuasa M28-AGM - Schiffsbatterien

Leistung

Spannung	12V
Kapazität 20 Std (vorgegeben)	70Ah
Kaltstartstrom (A) EN1	760A
Marine Cranking Amps (MCA)	920A
Watt Hour	840Wh

Abmessungen

Länge	278mm
Breite	175mm
Höhe	190mm



Maße und Gewichte

Durchschnittliches Gewicht	20.5kg
inkl. Säure	

Gehäuseeigenschaften

Gehäusotyp	L3 DIN AGM
Batteriehälter	B3
Tragegriffe	✓
Entgasung	✓
Semi Traktionseigenschaften	✓
Deckeltyp	VRLA

Technologie

Flammschutz	✓
Technologie	Ca/Ca VRLA
Adskiller	AGMSORTIMENT
Empfohlener Ladestrom	4A

Anschlusspol Typ

T1


Standard DIN Post



Positive Terminal


Negative Terminal

Zellenanordnung

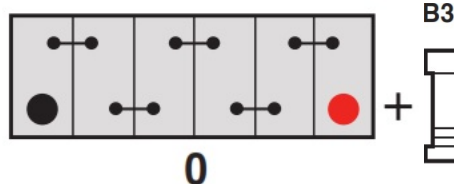

Batteriehälter

B3

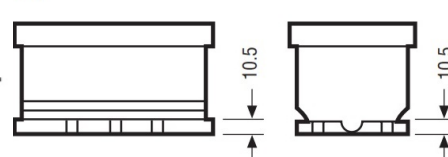

Datenblatt erstellt am 01/04/2025 - E&EO



Yuasa Technical Data Sheet

Yuasa M28-AGM - Marine Batteries

Performance

Voltage	12V
Capacity (20-hour)	70Ah
Cold Cranking Amps (EN1)	760A
Marine Cranking Amps (MCA)	920A
Watt Hour	840Wh

Dimensions

Length	278mm
Width	175mm
Height	190mm



Weights & Measures

Mean Weight with Acid	20.5kg
-----------------------	--------

Container Features

Case Type	L3 DIN AGM
Hold Down	B3
Handles	✓
End Venting	✓
Semi-Traction Features	✓
Lid Type	VRLA

Technology

Flame Arrestor	✓
Technology	Ca/Ca VRLA
Separator	AGM
Recommended Charge Rate	4A


Terminal Type

T1


Standard DIN Post



Cell Assembly Layout

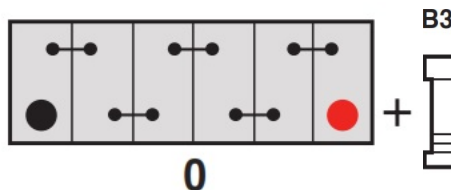

Battery Hold-down

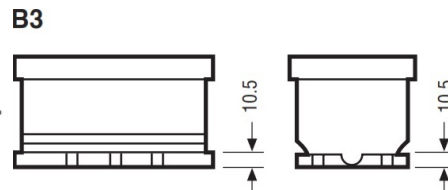

Data Sheet generated on 01/04/2025 – E&OE