



Yuasa Technisches Datenblatt

Yuasa YBX3069 - YBX3000 SMF Batterien

Leistung

Spannung	12V
Kapazität 20 Std (vorgegeben)	72Ah
Kaltstartstrom (A) EN1	630A

Abmessungen

Länge	269mm
Breite	174mm
Höhe	225mm

Maße und Gewichte

Durchschnittliches Gewicht inkl. Säure	17.5kg
--	--------



Gehäuseeigenschaften

Gehäusotyp	JIS D26 + B9
Zellenanordnung	1
Batteriehälter	B5
Ladezustandsanzeige	✓
Tragegriffe	✓
Entgasung	✓
Deckeltyp	SMF doppelwandige Deckelkonstruktion


Technologie

Flammschutz	✓
Technologie	Ca/Ca
Adskiller	PE
VDA Überschlagentest	✓
Empfohlener Ladestrom	4A
Performance Marking	W4-C2-V3-E1

Anschlusspol Typ

T1


Standard DIN Post

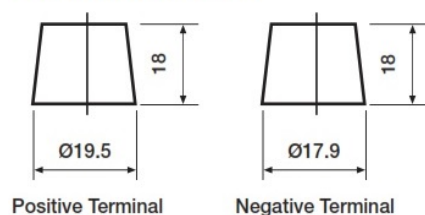


Positive Terminal

Negative Terminal

Zellenanordnung

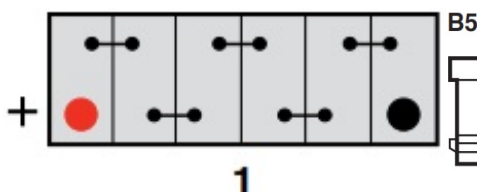

Batteriehälter

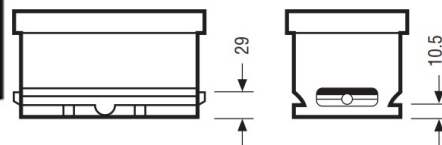

Datenblatt erstellt am 13/06/2024 - E&EO



Yuasa Technical Data Sheet

Yuasa YBX3069 - YBX3000 SMF Batteries

Performance

Voltage	12V
Capacity (20-hour)	72Ah
Cold Cranking Amps (EN1)	630A

Dimensions

Length	269mm
Width	174mm
Height	225mm

Weights & Measures

Mean Weight with Acid	17.5kg
-----------------------	--------



Container Features

Case Type	JIS D26 + B9
Cell Layout	1
Hold Down	B5
State of Charge Indicator	✓
Handles	✓
End Venting	✓
Lid Type	SMF Double Lid

Technology

Flame Arrestor	✓
Technology	Ca/Ca
Separator	PE
VDA Roll Over Test	✓
Recommended Charge Rate	4A
Performance Marking	W4-C2-V3-E1


Terminal Type

T1


Standard DIN Post



Cell Assembly Layout

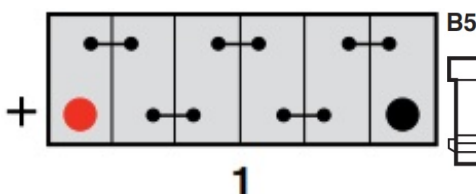

Battery Hold-down

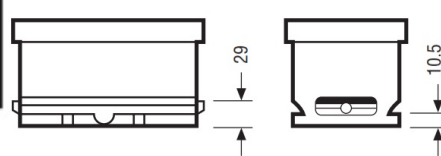

Data Sheet generated on 13/06/2024 - E&OE