



## Yuasa Technisches Datenblatt

### Yuasa YBX3334 - YBX3000 SMF Batterien

#### Leistung

Spannung 12V  
Kapazität 20 Std (vorgegeben) 95Ah  
Kaltstartstrom (A) EN1 720A

#### Abmessungen

Länge 303mm  
Breite 174mm  
Höhe 222mm

#### Maße und Gewichte

Durchschnittliches Gewicht 20.8kg  
inkl. Säure



#### Gehäuseeigenschaften

Gehäusetyp JIS D31 + BH  
Zellenanordnung 1  
Batteriehälter B1  
Ladezustandsanzeige ✓  
Tragegriffe ✓  
Entgasung ✓  
Deckeltyp SMF doppelwandige  
Deckelkonstruktion

#### Technologie

Flammschutz ✓  
Technologie Ca/Ca  
Adskiller PE  
VDA Überschlagentest ✓  
Empfohlener Ladestrom 4A  
Performance Marking W3-C2-V2-E1

#### Anschlusspol Typ

##### T1


Standard DIN Post




Positive Terminal

Negative Terminal

#### Zellenanordnung

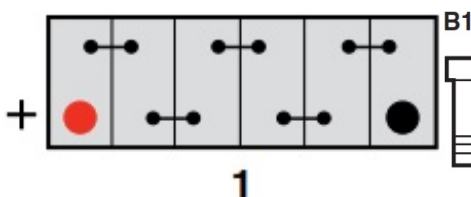

#### Batteriehälter

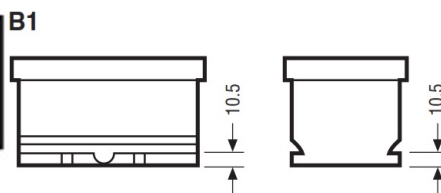

Datenblatt erstellt am 13/06/2024 - E&EO



## Yuasa Technical Data Sheet

### Yuasa YBX3334 - YBX3000 SMF Batteries

#### Performance

|                          |      |
|--------------------------|------|
| Voltage                  | 12V  |
| Capacity (20-hour)       | 95Ah |
| Cold Cranking Amps (EN1) | 720A |

#### Dimensions

|        |       |
|--------|-------|
| Length | 303mm |
| Width  | 174mm |
| Height | 222mm |

#### Weights & Measures

|                       |        |
|-----------------------|--------|
| Mean Weight with Acid | 20.8kg |
|-----------------------|--------|



#### Container Features

|                           |                |
|---------------------------|----------------|
| Case Type                 | JIS D31 + BH   |
| Cell Layout               | 1              |
| Hold Down                 | B1             |
| State of Charge Indicator | ✓              |
| Handles                   | ✓              |
| End Venting               | ✓              |
| Lid Type                  | SMF Double Lid |

#### Technology

|                         |             |
|-------------------------|-------------|
| Flame Arrestor          | ✓           |
| Technology              | Ca/Ca       |
| Separator               | PE          |
| VDA Roll Over Test      | ✓           |
| Recommended Charge Rate | 4A          |
| Performance Marking     | W3-C2-V2-E1 |


#### Terminal Type

#### Cell Assembly Layout


#### Battery Hold-down

##### T1



Standard DIN Post



Positive Terminal



Negative Terminal

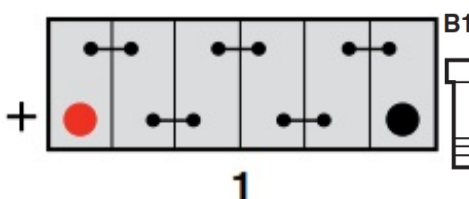

Data Sheet generated on 13/06/2024 - E&OE