



Yuasa Technisches Datenblatt

Yuasa YBX5075 - YBX5000 Silver High Performance SMF Batterien

* Due to unprecedented demand following the easing of COVID-19 lockdown measures, this product may be supplied without a state of charge indicator and not conform to the level of roll over protection advertised. Product performance and quality are not affected by this. Please check battery labels for specification details.

Leistung

Spannung 12V
Kapazität 20 Std (vorgegeben) 60Ah
Kaltstartstrom (A) EN1 640A

Abmessungen

Länge 243mm
Breite 175mm
Höhe 175mm

Maße und Gewichte

Durchschnittliches Gewicht inkl. Säure 14.7kg



Gehäuseeigenschaften

Gehäusotyp LB2 DIN
Batteriehälter B13/B14
Ladezustandsanzeige ✓
Tragegriffe ✓
Entgasung ✓
Deckeltyp SMF doppelwandige Deckelkonstruktion


Technologie

Flammschutz ✓
Technologie Ca/Ca
Adskiller PE
VDA Überschlagentest ✓
Empfohlener Ladestrom 4A
Performance Marking W4-C2-V3-E1


Anschlusspol Typ

T1

Standard DIN Post

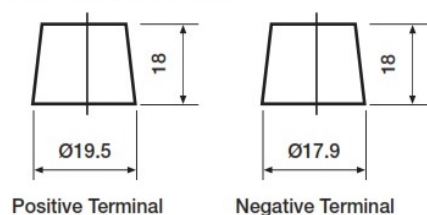


Zellenanordnung

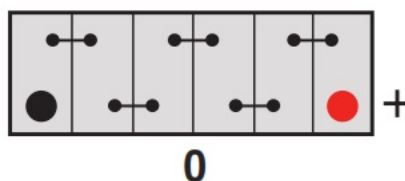

Batteriehälter

B3/B4 (B3 with Hold-Down adaptor)

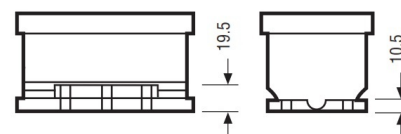

Datenblatt erstellt am 13/06/2024 - E&EO



Yuasa Technical Data Sheet

Yuasa YBX5075 - YBX5000 Silver High Performance SMF Batteries

* Due to unprecedented demand following the easing of COVID-19 lockdown measures, this product may be supplied without a state of charge indicator and not conform to the level of roll over protection advertised. Product performance and quality are not affected by this. Please check battery labels for specification details.

Performance

Voltage	12V
Capacity (20-hour)	60Ah
Cold Cranking Amps (EN1)	640A

Dimensions

Length	243mm
Width	175mm
Height	175mm

Weights & Measures

Mean Weight with Acid	14.7kg
-----------------------	--------



Container Features

Case Type	LB2 DIN
Hold Down	B13/B14
State of Charge Indicator	✓
Handles	✓
End Venting	✓
Lid Type	SMF Double Lid


Technology

Flame Arrestor	✓
Technology	Ca/Ca
Separator	PE
VDA Roll Over Test	✓
Recommended Charge Rate	4A
Performance Marking	W4-C2-V3-E1


Terminal Type

T1

Standard DIN Post

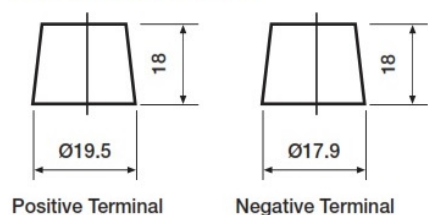


Cell Assembly Layout

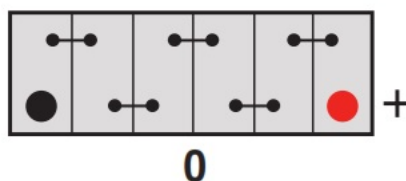

Battery Hold-down

B3/B4 (B3 with Hold-Down adaptor)

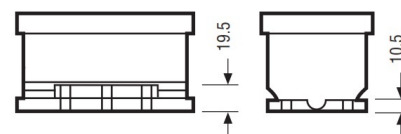

Data Sheet generated on 13/06/2024 - E&OE