



Yuasa Technisches Datenblatt

Yuasa YBX7096 - YBX7000 EFB Start Stop Plus Batterien

* Due to unprecedented demand following the easing of COVID-19 lockdown measures, this product may be supplied without a state of charge indicator and not conform to the level of roll over protection advertised. Product performance and quality are not affected by this. Please check battery labels for specification details.

Leistung

Spannung 12V
Kapazität 20 Std (vorgegeben) 75Ah
Kaltstartstrom (A) EN1 700A

Abmessungen

Länge 278mm
Breite 175mm
Höhe 190mm

Maße und Gewichte

Durchschnittliches Gewicht inkl. Säure 19.3kg



Gehäuseeigenschaften

Gehäusetyp L3 DIN EFB
Batteriehälter B3
Ladezustandsanzeige ✓
Tragegriffe ✓
Entgasung ✓
Deckeltyp SMF doppelwandige Deckelkonstruktion


Technologie

Flammschutz ✓
Technologie Ca/Ca
Adskiller PE
VDA Überschlagentest ✓
Empfohlener Ladestrom 4A
Performance Marking W3-C2-V3-M1


Anschlusspol Typ

T1


Standard DIN Post

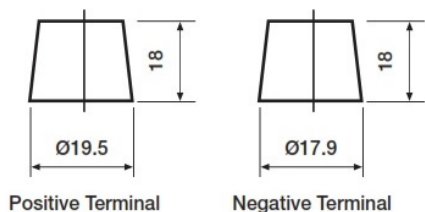

Zellenanordnung

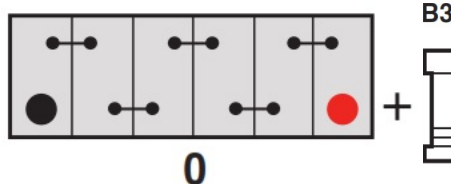

Batteriehälter

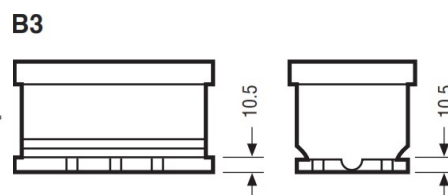

Datenblatt erstellt am 14/06/2024 - E&EO



Yuasa Technical Data Sheet

Yuasa YBX7096 - YBX7000 EFB Start Stop Plus Batteries

* Due to unprecedented demand following the easing of COVID-19 lockdown measures, this product may be supplied without a state of charge indicator and not conform to the level of roll over protection advertised. Product performance and quality are not affected by this. Please check battery labels for specification details.

Performance

Voltage	12V
Capacity (20-hour)	75Ah
Cold Cranking Amps (EN1)	700A

Dimensions

Length	278mm
Width	175mm
Height	190mm

Weights & Measures

Mean Weight with Acid	19.3kg
-----------------------	--------



Container Features

Case Type	L3 DIN EFB
Hold Down	B3
State of Charge Indicator	✓
Handles	✓
End Venting	✓
Lid Type	SMF Double Lid


Technology

Flame Arrestor	✓
Technology	Ca/Ca
Separator	PE
VDA Roll Over Test	✓
Recommended Charge Rate	4A
Performance Marking	W3-C2-V3-M1


Terminal Type

T1


Standard DIN Post

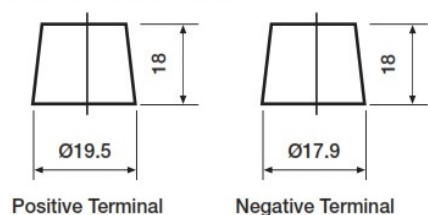

Cell Assembly Layout

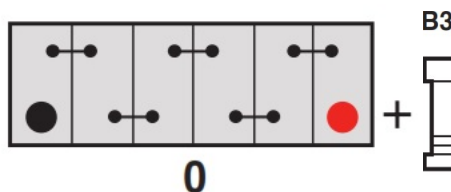

Battery Hold-down

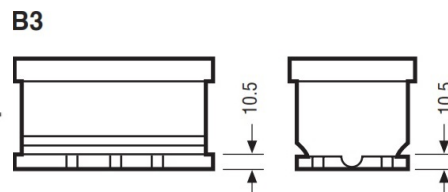

Data Sheet generated on 14/06/2024 - E&OE